

NUURA



RIZZATTO 32

Design: Paolo Rizzato, 2021. US-model.

The Rizzato collection comprises two pendants and a ceiling light. The organic shapes created by mouth-blown glass are one feature all three have in common.


The pendants comprise brass-coloured anodised aluminium and mouth-blown glass. The light unfolds from its source, and diffuses wonderfully through the opal-white glass, creating soft, comfortable quality lighting. Two of the pendants are height-adjustable, making them versatile for use in private homes or public places. The ceiling light is mounted directly on the ceiling, making it possible to create unique, decorative ceiling lighting.

Rizzato 32, gives a soft and even light, making it ideal to place above a dining table or sofa. It is also great for either the bedroom or the hallway.

Rizzato collection

The Rizzato collection include the following products:

- **Rizzato 32:** Satin Brass - Opal White
- **Rizzato 42:** Satin Brass - Opal White
- **Rizzato 43:** Satin Brass - Opal White

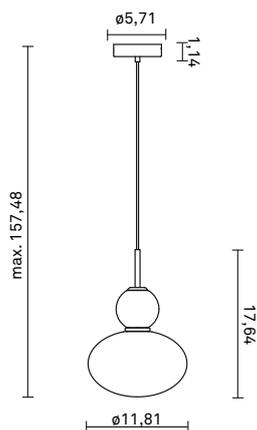

TECHNICAL INFO

Product no.: 92690424

Type: Suspension - Indoor

Colour:

Glass: Opal White
Metal: Satin Brass
Cable: Gold

Materials:

Coated metal
Mouth-blown glass
Fabric covered cable

Dimensions:

ø11,81in x 17,64in
Ceiling plate: ø5,71in x 1,14in
Fabric cable - Length: 157,48in
Weight: 3010 g

Packaging:

Dimensions: L: 15,75in x W: 11,02in x H: 20,67in
Weight: 980 g
Total weight incl. product: 3990 g
Number of parcels: 1
Material: Brown cardboard.

Packaging - weight - material:

Cardboard outside: - g
Cardboard inside: - g
Bubble wrap: - g
Plastic bag: - g
Styrofoam: - g

Cleaning:

Use a soft dry cloth to clean the product.
Do not use household cleaners.

Certifications and labels:

CE - CE-certified
IP Rating - IP20
⊕ - Class I
ETL - ETL-listed

Light source:

Socket: E26 (T38)
Max wattage: 20W LED
Voltage (V): 120V

Bulb not included


Dimmable if installed with appropriate dimmable LED light source suitable for your dimmer circuit.

Light source can be added to delivery on request or via our webshop, nuura.com.

For DALI compatibility, we recommend to use the Hytronik Trailing Edge Dimmer (HDD2200 DALI Dimmer) and our recommended light sources.

HDD2200 DALI Dimmer can be added to delivery on request.

Included ceiling plate:

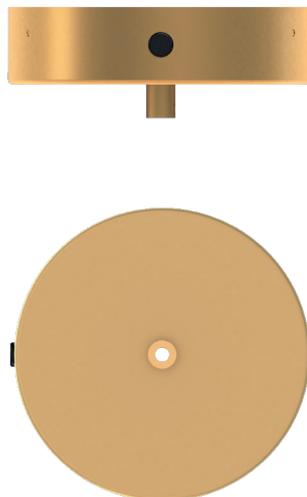

Safety instructions

Important! Before commencing installation work disconnect the main cable from the power supply - remove fuse or turn switch to "OFF"!

1. Installation should be carried out in accordance with the local safety regulations.
2. In order to prevent damage, please check walls for cables before drilling holes.
3. Please ensure that all electrical connections (even preassembled lamps) are screwed tightly or are fully inserted as good contact is essential for a long life-span at high currents. Please check for tight connections after changing or adjusting lamps. Screwed connections must be tightened after 20 minutes.
4. Please do not place objects on your system (e.g. for decorative purposes) if they were not delivered with the system.
5. The lamps get very hot when in use. Please allow lamps to cool down before touching.
6. Do not change lamps or spots when switched on.
7. System should not be enlarged with additional lamps.
8. We reserve the right to make technical alterations.

Please keep these instructions.

Fitting: E14

Use of a dimmer is highly recommended
(Must be compatible with type of bulb.)


The glass used for this lamp is hand-blown.

Only 1st. quality has been chosen.

Air bubbles and variations in thickness and colour is normal.

Rizzato 32

Assembly Instructions

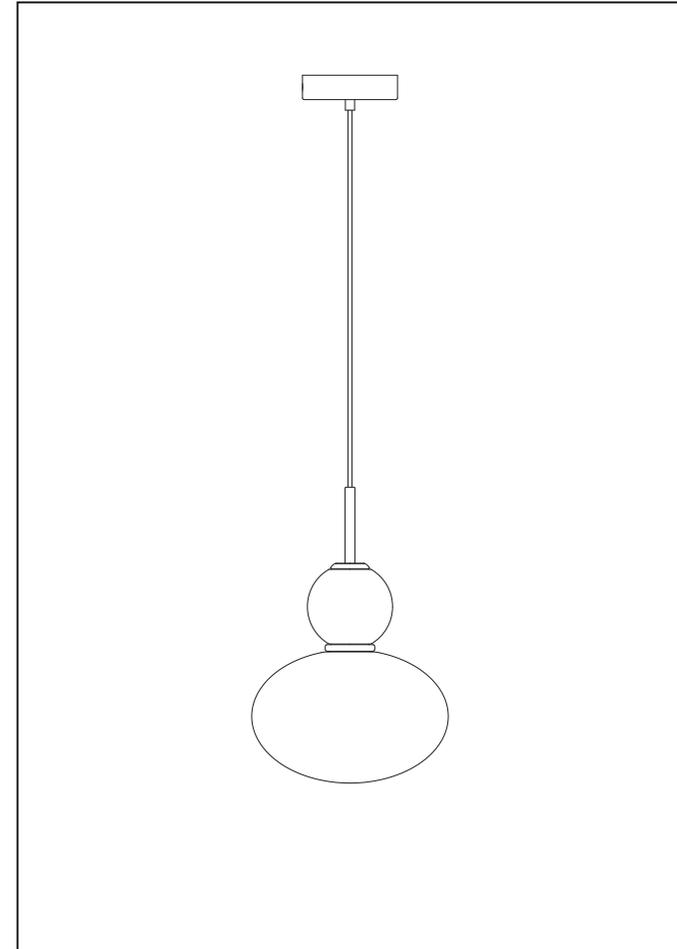

NUURA


www.nuura.com
info@nuura.com

CE


© 2019 All rights reserved

NUURA


© 2019 All rights reserved

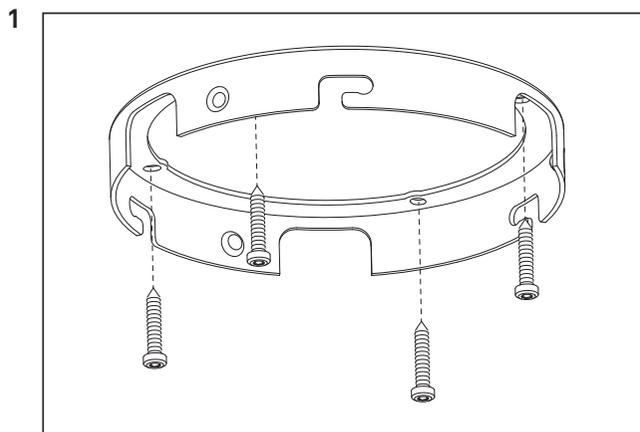


Mount the top plate to the ceiling with screws.
Please make sure it is fixated properly.

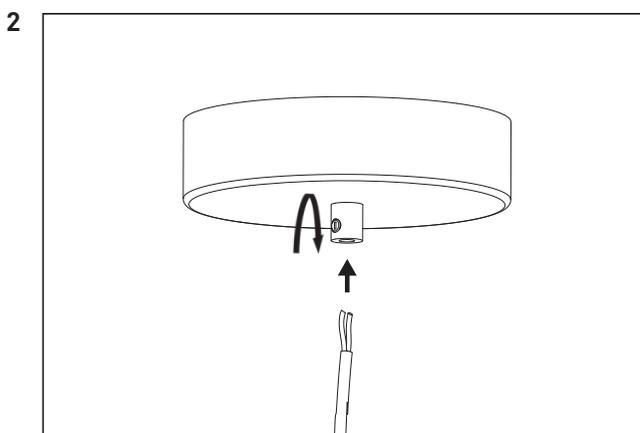


Lead the fabric cable in through the cable relief at the bottom of the ceiling plate. Adjust the cable to the desired length. Be sure to tighten the screw carefully and to leave enough of the cable inside the ceiling plate so the end can reach the cable connector.

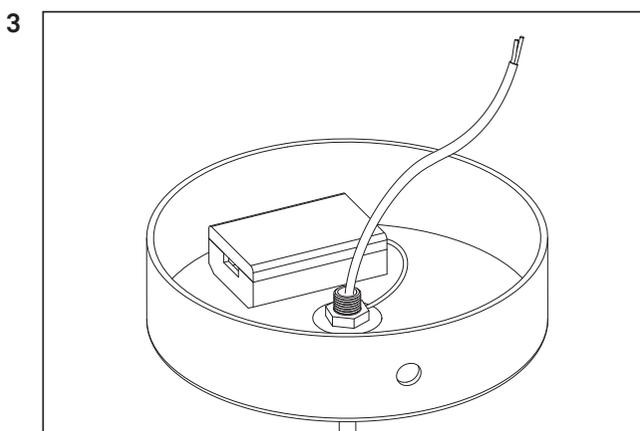


Cut the excess cable of.
Please make sure the cable is long enough to reach the cable-connector.

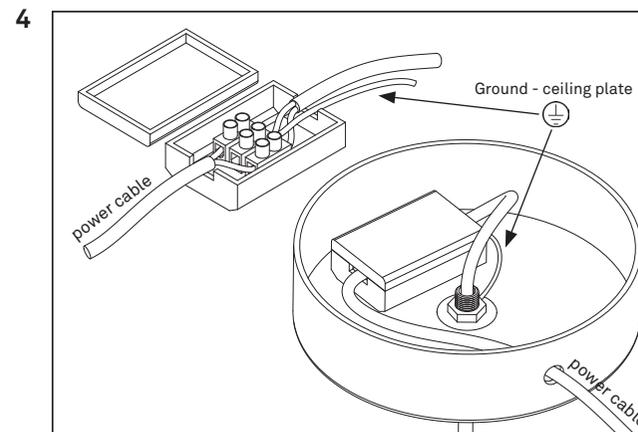

Install the power cable by leading it through either the top or the side of the ceiling plate through the cable relief and into the cable connector. Please make sure the cable relief is tightened.

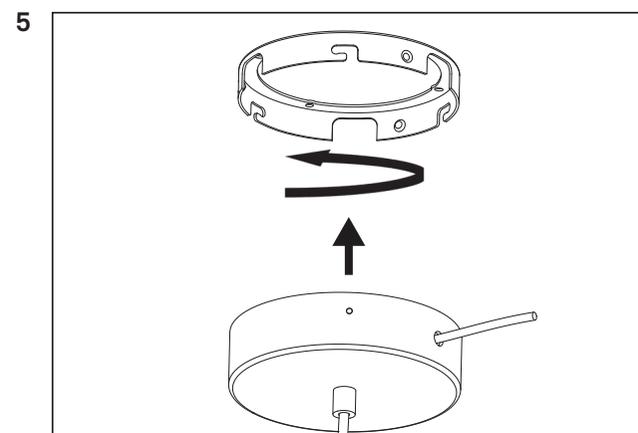


Attach the ceiling plate to the top plate by turning the ceiling plate.

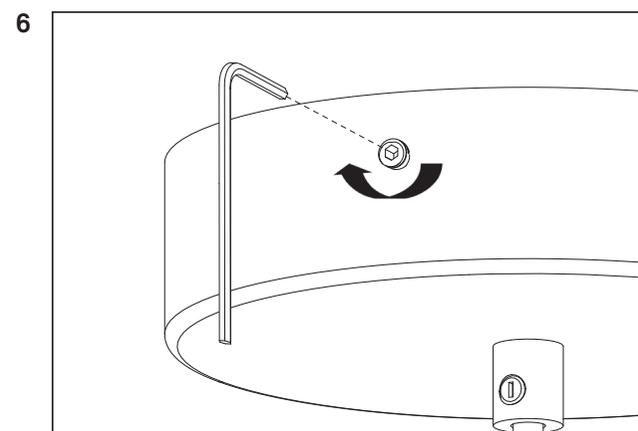


Fixate with the socket screw. Install the socket screw with the Allen key provided.

NB: Please use only correct provided Allen key.


Please make sure everything is fixated properly.

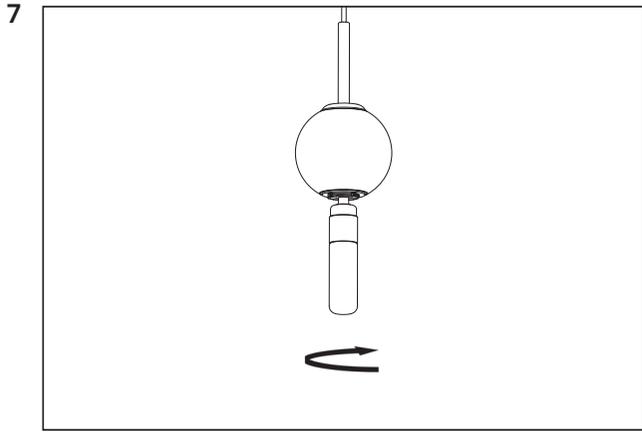

Screw the light bulb into the socket.

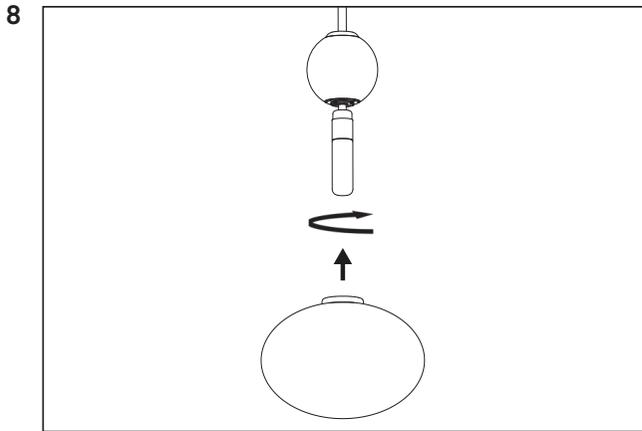

Take the glass globe and carefully place it over the light bulb and socket.
Fixate it by turning the glass globe clockwise.
Please make sure they are fixated properly.

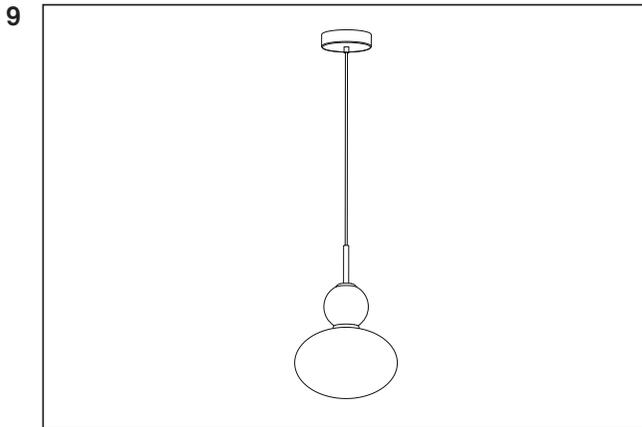

Completed.